



T8600-S/P TREADMILL

OWNER'S MANUAL SUPPLEMENT

Spacious

- Spacious 20" x 60" running area

Pre-Waxed Slik-Deck™

- 1" Thick Commercial-Grade phenolic coated deck, double sided.

Siegling U.S. Cool-Weave™ Belt Design

- Cool-Weave™ Design helps to disperse heat over a greater surface area.

Speed Limit

- The Simple console has the capability of having a lower maximum speed calibrated into the console. Contact Tech Service at 1-800-335-4348 Ext. 12 for phone instructions.

Powerful 2.5 HP Continuous Duty/Commercial-Grade Motor


- U.S. made industrial grade motor, with full sealed bearing construction
- Easy access to motor brushes
- Open frame design for superior ventilation
- Internal Fan

DCI Commercial-Grade PWM Motor Controller

- Internal Fan

Emergency Stop

- Your treadmill is designed with a Red Emergency Stop Button that will cut power to the treadmill if pressed down.

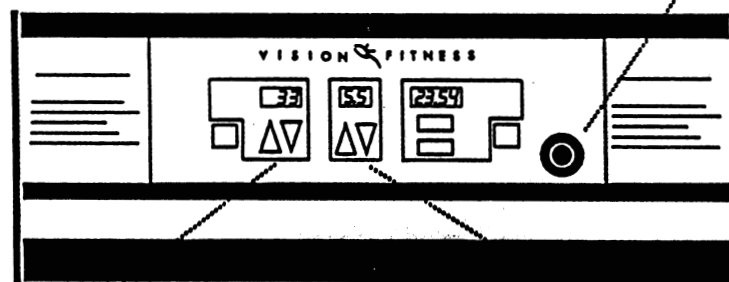

Speed

- Both the Simple and the Programmable consoles have a starting speed of .5 mph and a maximum speed of 12 mph.

Elevation

- Both the Simple and the Programmable treadmills have 12% incline maximum.

T8600-S Operation

- One Button Start™, no programming.

T8600-P Operation

- Refer to the T8500 Programming found on page 14 of the Treadmill Owner's Manual.